



FATADA LATERALA DREAPTA

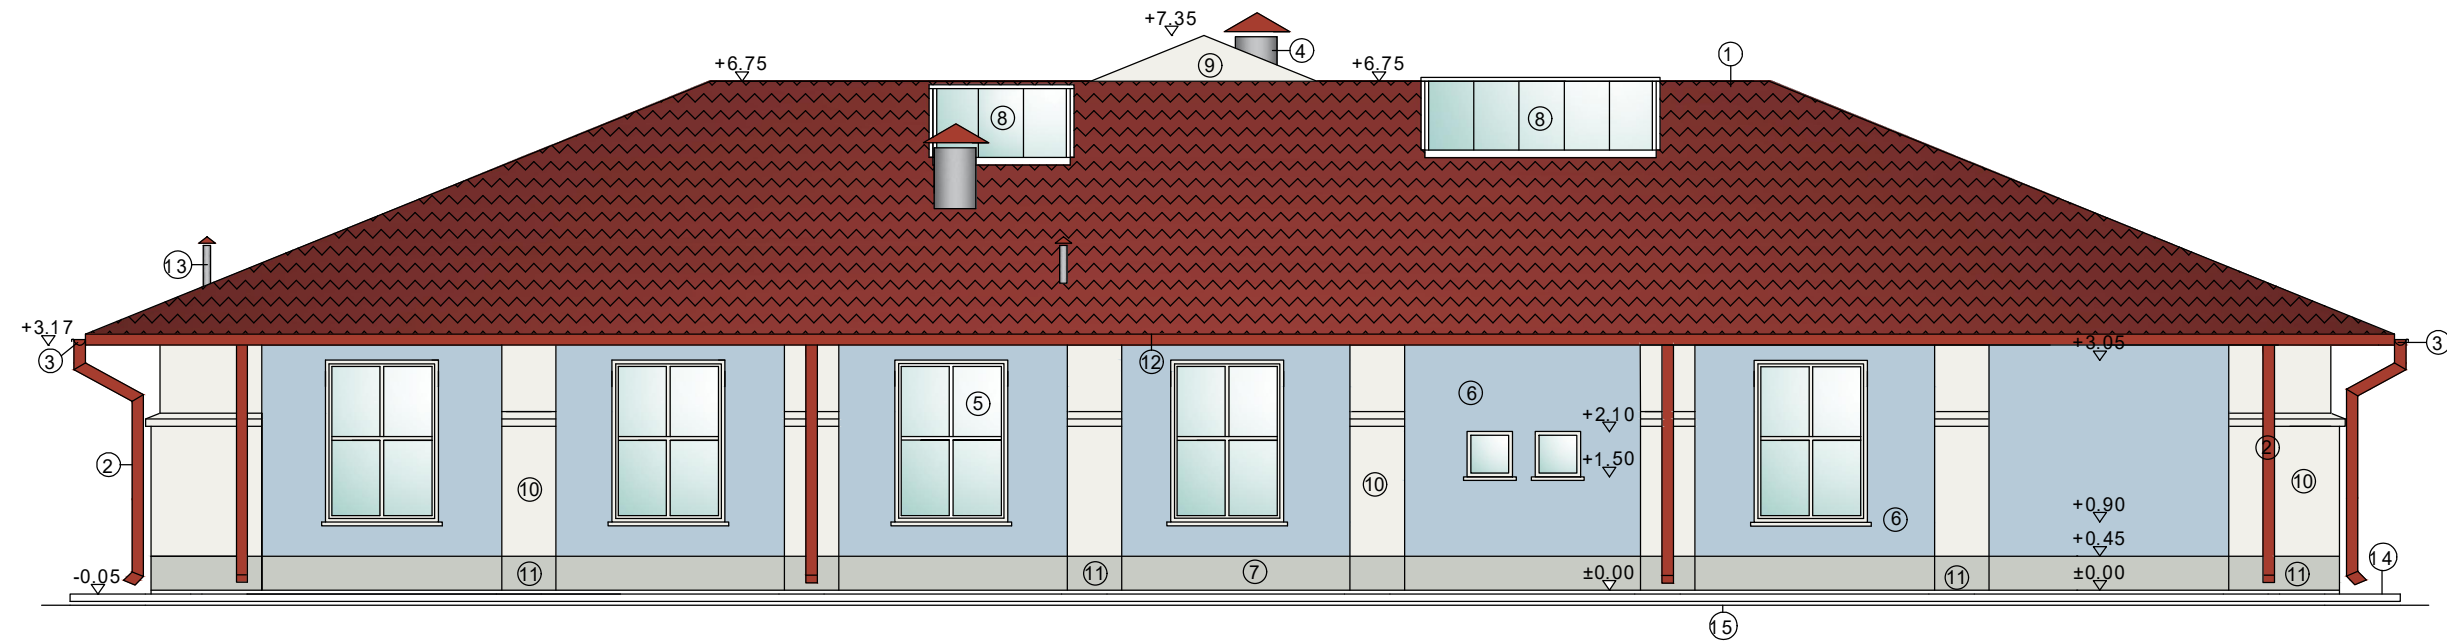

FATADA LATERALA STANGA

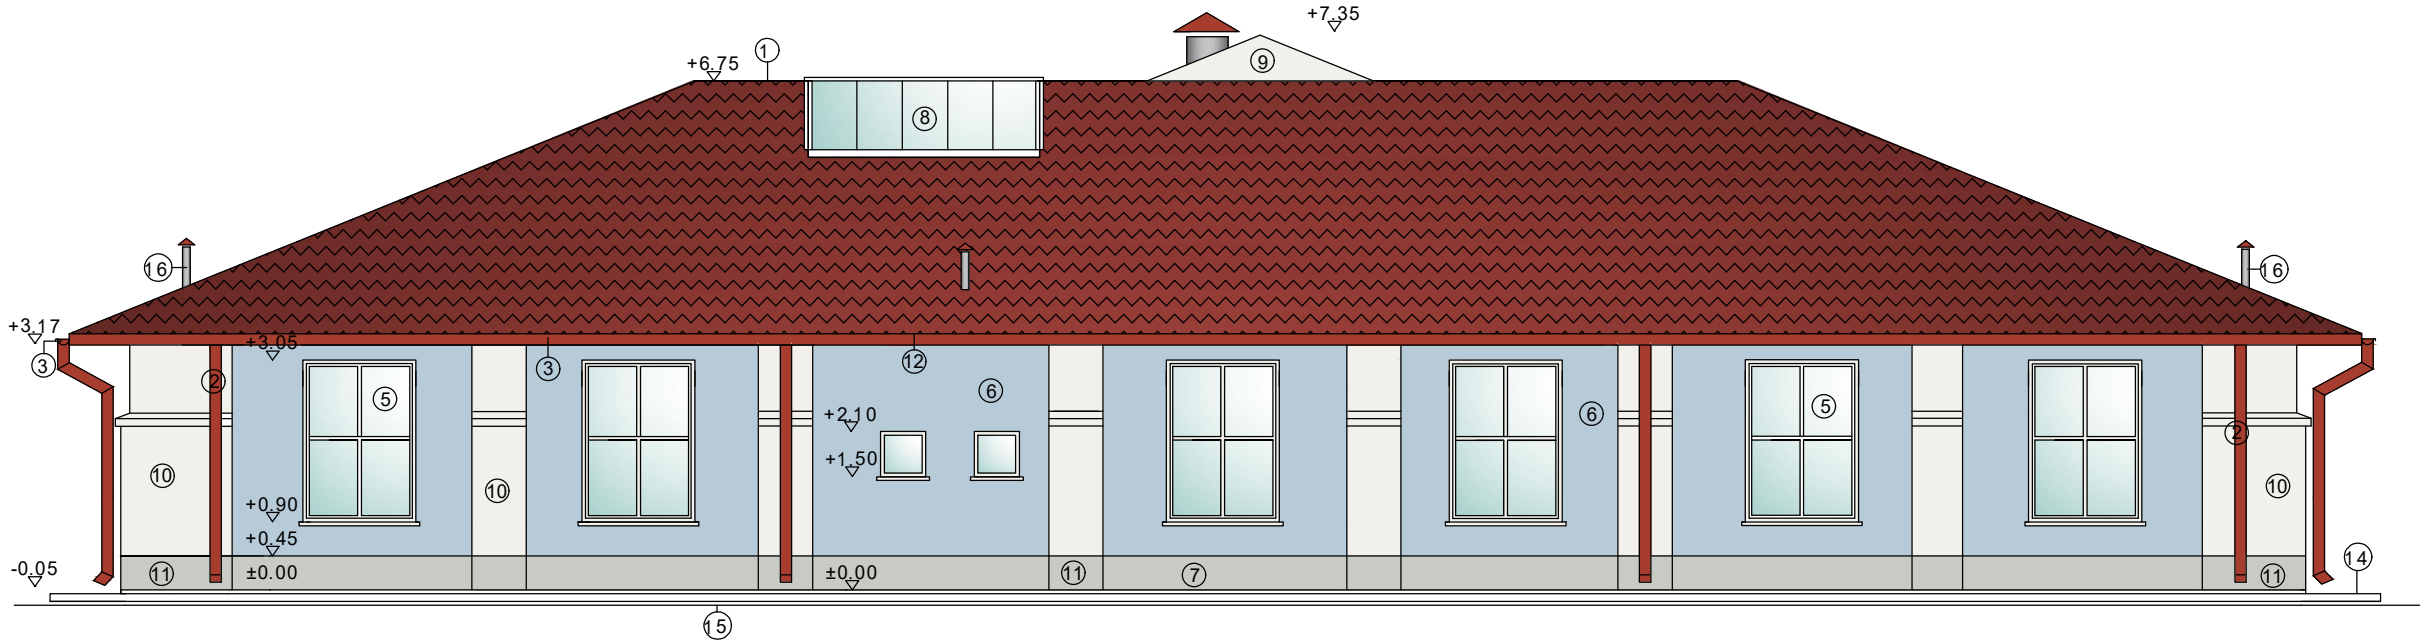

LEGENDA

1. Invelitoare din tigla metalica
2. Burlane din tabla
3. Jgheaburi semirotunde din tabla
4. Cos pentru ventilatie naturala
5. Tamplarie PVC cu geamuri termoizolante avand ochiuri oscilobatante
6. Termosistem cu placi polistiren expandat ignifugat de 8 cm grosime, tencuieli decorative tip Baumit
7. Termosistem cu placi polistiern extrudat ignifugat de 5 cm grosime, tencuieli decorative tip Baumit
8. Luminatoare din placi polycarbonat tip Multicell translucid, avand capete ventilatie operate manual
9. zid antifoc, tencuieli simple dricuite, zugraveli var alb in doua straturi
10. Tencuieli simple dricuite, zugraveli var alb in doua straturi
11. Tecuieli simple dricuite, zugraveli vad in doua straturi
12. Ventilatie coloane instalatii sanitare
13. Trotuar garda, beton amrentat
14. Teren natural
15. Cosuri ventilatie hota din tabla

| | | | | | |
|--|--------------------|--------|-----------------|--|-------------------------|
| Verificat | | | | Referat nr.din..... | |
| SC BIA CONSPROIECT SRL BRAILA J 9/9/2012 CUI 29523300 7111 - Activitati de arhitectura 7112 - Activitati de inginerie si consultanta tehnica legate de acestea Tel/Fax:0339805917 0752/281879 Mail: biaoconsprioect@yahoo.com | | | | BENEFICIAR: MUNICIPIUL PLOIESTI B-dul Republicii Nr. 2, Mun. Ploiesti, Jud. Prahova | PROIECT NR. 193/2019 |
| Specificatie | Numele | Semnat | Scara: 1:100 | TITLU PROIECT: <i>Extindere capacitate cazare camin de batrani</i> Str. Cosminele Nr. 11A, Mun. Ploiesti, Jud. Prahova | FAZA: S.F. |
| Sef proiect | Ing. D. AGRIGOROAE | | Data: 2019 | TITLU PLANSA: FATADE LATERALE PROPUSE | PLANSA A12 |
| Proiectat | Arh. C. BERBEC | | | | |
| Desenat | Arh. C. BERBEC | | | | |