


Profil transversal P6 - P6, rau Dambru, loc. Ploiesti, jud. Prahova  
scara 1:100

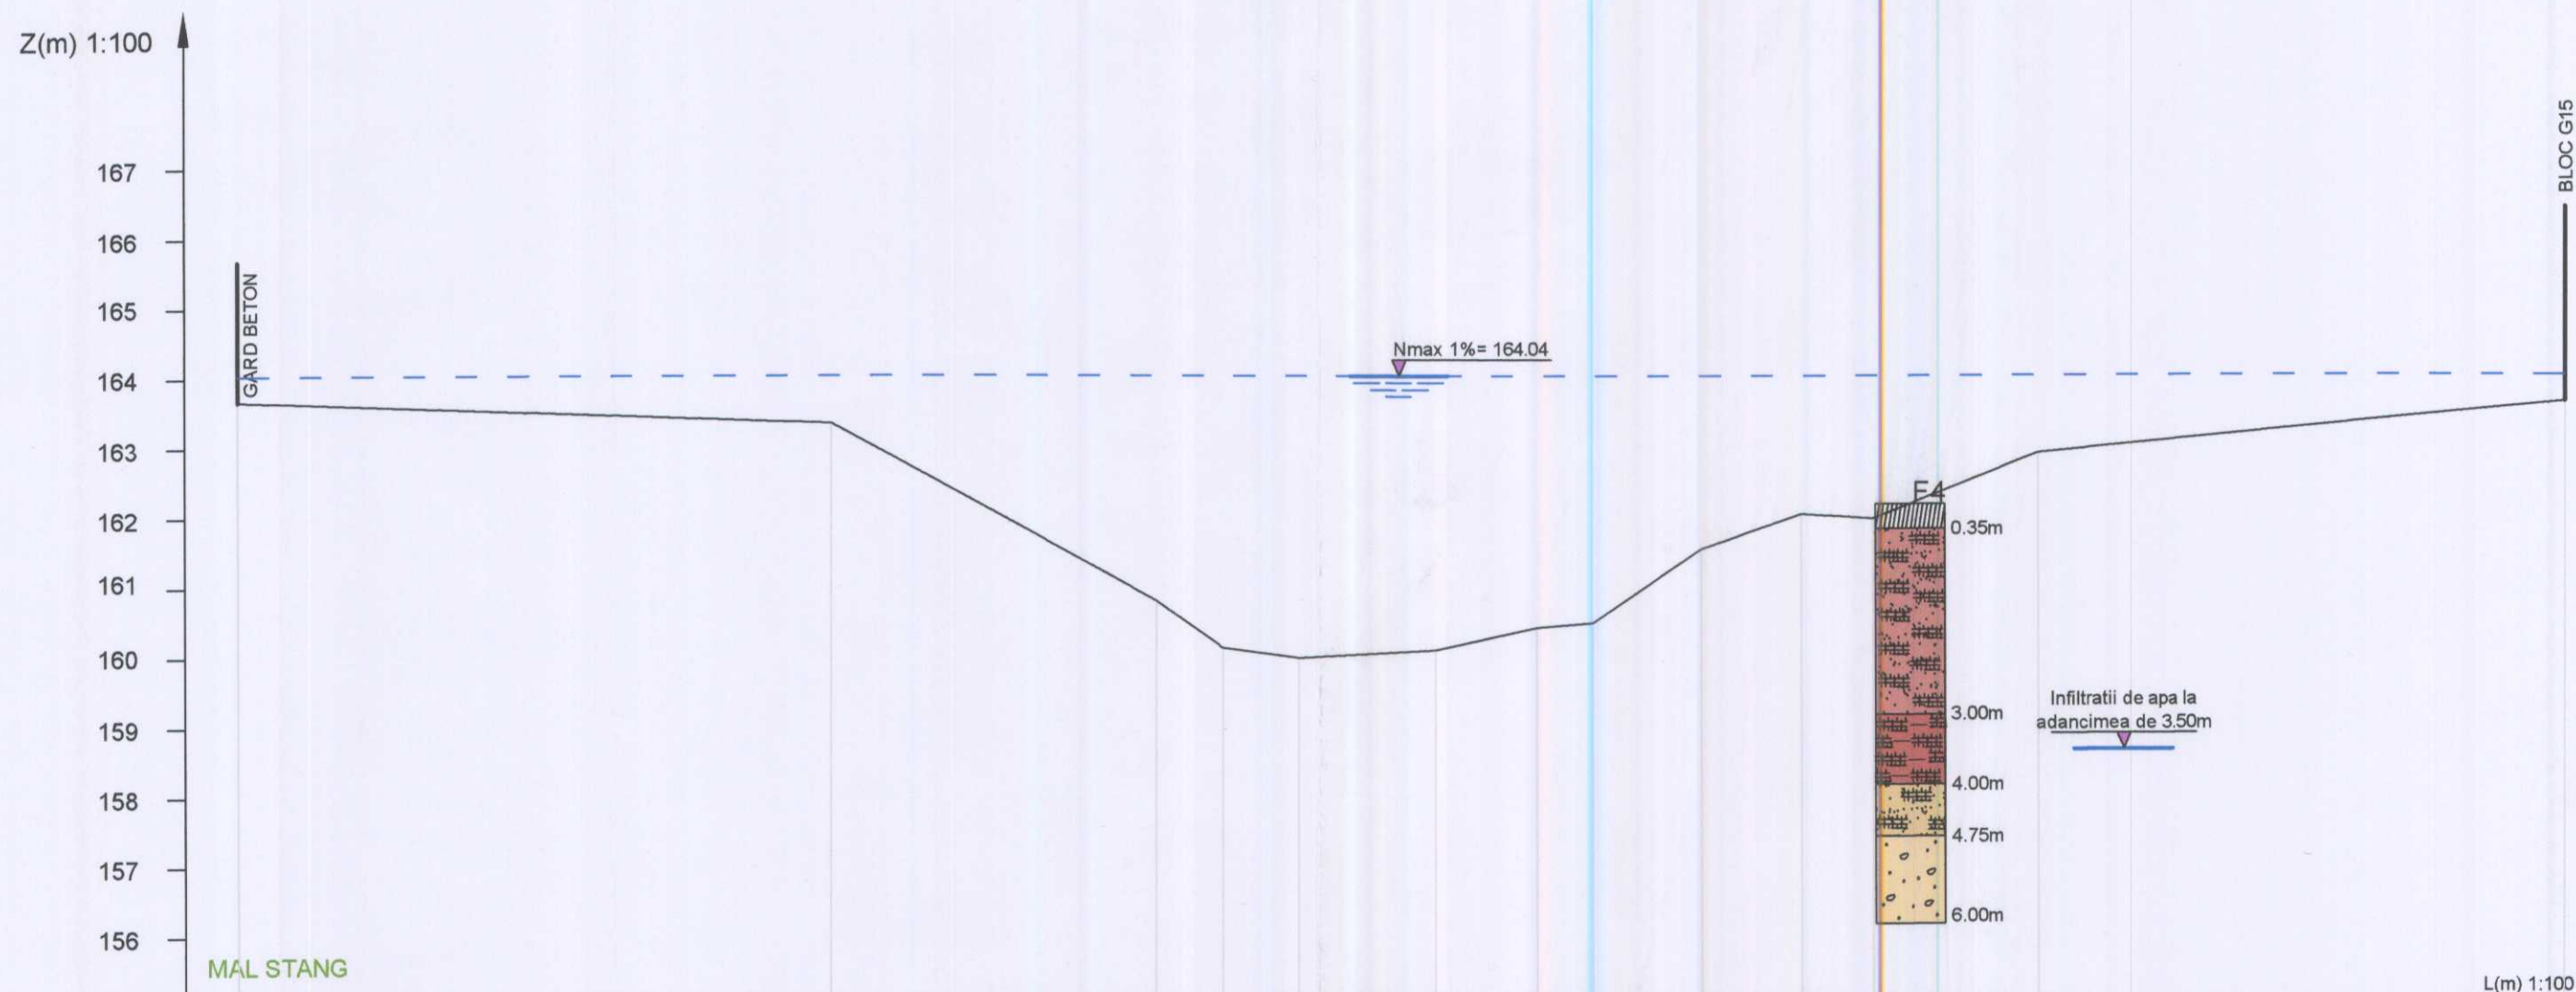

NR.PCT.	1	2	3	4	5	6	7	8	9	10	11	12	13
DISTANTE PARTIALE		8.58	4.70	0.97	1.09	1.99	1.46	0.82	1.55	1.44	1.04	2.38	7.58
DISTANTE CUMULATE	0.00	8.58	13.28	14.25	15.34	17.33	18.79	19.61	21.16	22.60	23.64	26.02	33.60
COTE TEREN	163.67	163.36	160.82	160.15	160.01	160.12	160.44	160.51	161.56	162.06	161.99	162.93	163.66

LEGENDA FORAJE

- umpluturi in masa de sol vegetal;
- APN** - argila prafoasa nisipoasa cafenie plastic vartoasa cu multe elemente de pietrisuri;
- PA** - praf argilos cafeniu roscat, plastic vartos, cu elemente de pietrisuri;
- AN** - argila nisipoasa **plastic consistenta**, cu lentile de nisip si cu pietrisuri;
- P+N** - pietrisuri si nisipuri, cu elemente de bolovanisuri.

Verificator/ Expert	Nume	Semnatura	Cerinta	Referat / Expertiza Nr. / Data	
S.C. SNIF PROIECT S.A. Targoviste Numar de inmatriculare J15/925/2005				Beneficiar: <b>MUNICIPIUL PLOIESTI</b>	Pr. nr. 364/2018
Specificatie	Nume	Semnatura	Scara: 1:100	<b>"Amenajare maluri parau Dambru, zona Polux"</b>	Faza Studiu de inundabilitate
Sef proiect	Ing. Bobeica Ion				
Proiectat	Ing. Stefan Nicoleta		Data: 2018		
Desenat	Ing. Stan-Mirea Irina				
Profil transversal P6 - P6 rau Dambru, loc. Ploiesti, jud. Prahova				PI. nr. 9	