




**LEGENDA:**

	- PERETI DIN BETON ARMAT - EI 180
	- STALPI DIN BETON ARMAT - R60
	- PERETI DIN ZIDARIE DE CARAMIDA - EI180
	- PERETI PROPUSI DIN ZIDARIE - EI 180
	- GOLURI PROPUSE A SE ZIDI CU BCA - EI 180
	- PERETI DE COMPARTIMENTARE PROPUSI A SE DESFIINTA
	- TERMOIZOLATIE PROPUSI DIN PLACI DE FATADA DIN VATA BAZALTICA DE 15 CM
	- CAMASUJALA BETON 5 CM
	- PERETI DE COMPARTIMENTARE DIN HPL

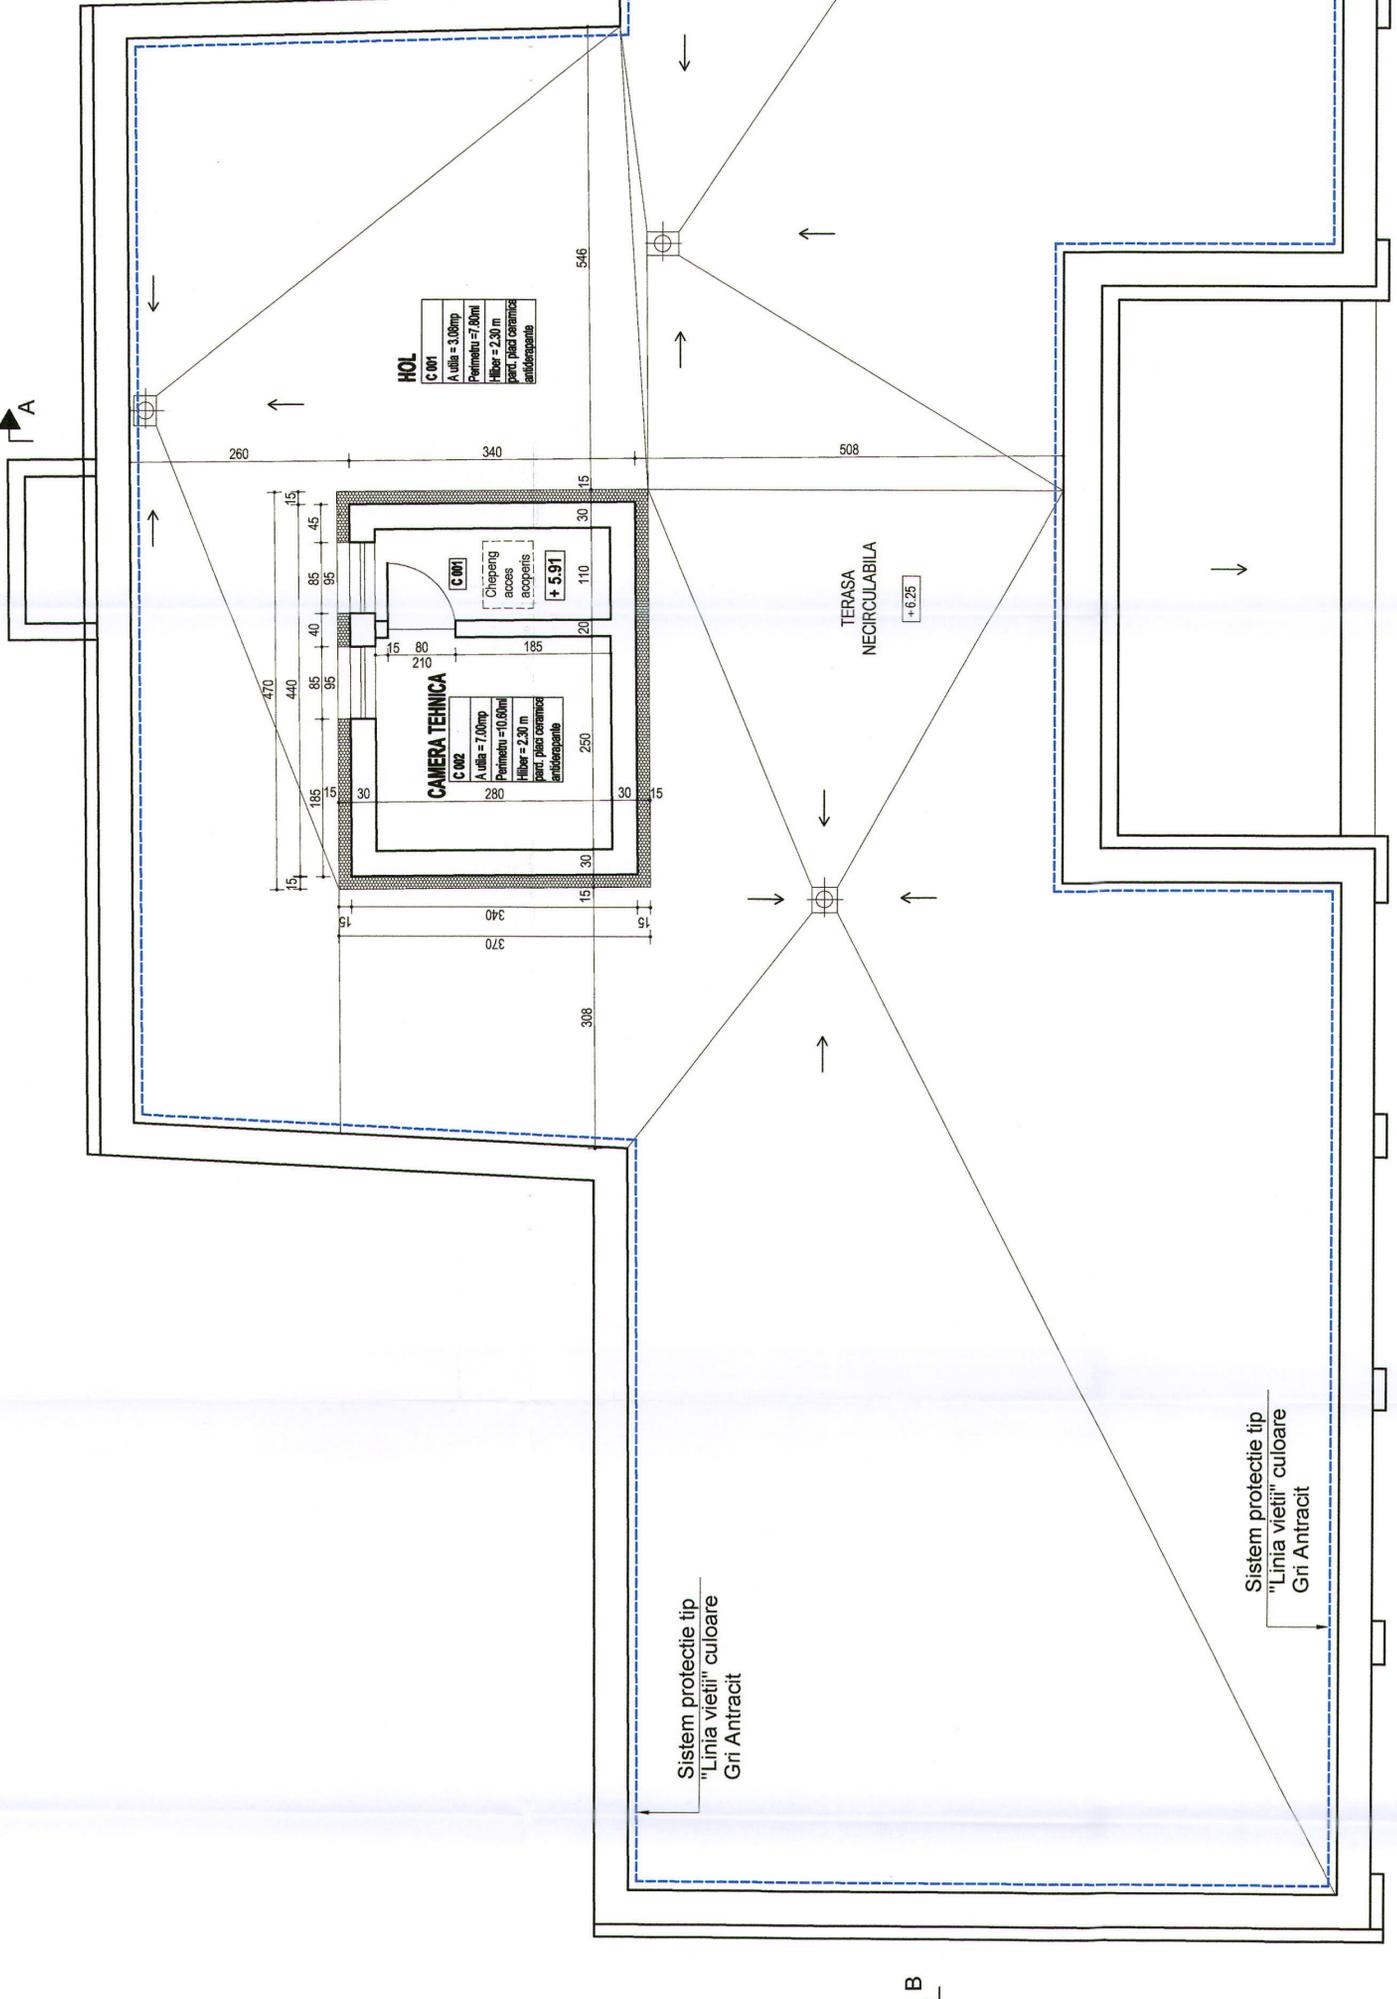

- COMPARTIMENT DE INCENDIU I SUPRATERAN
- A construita compartiment I = 388.58 mp
- A desfasurata compartiment I = 792.44 mp

**CARACTERISTICI CONSTRUCTIE:**

- CATEGORIA DE IMPORTANTA ESTE 'D', CONF. HGR 769/97
- CLASA DE IMPORTANTA ESTE IV, CONF. P. 100-1/2013
- GRADUL DE REZISTENTA LA FOC ESTE II SI RISC MIC DE INCENDIU, CONF. P. 100
- PERETI DIN ZIDARIE CARAMIDA - EI 180
- SCARA ACCES ETALAJ DIN BETON ARMAT - R60
- PLANSEU PESTE PARTER/ ETALAJ DIN BETON ARMAT - REI 60
- A construita camera troliu = 17.39 mp (cu termosistem inclus)
- A utila camera troliu = 10.08 mp
- A desfasurata = 961.44 mp (cu termosistem inclus)

VERIFICATOR	NUME	SEMNATURA	REFERAT/EXPERTIZA NR.
Proiectant general:	SC HAUSPLAN PROIECT SRL		DATA
	J29/3487/2007; CUI/22966067		197/2022
	tel. 0723374596; e-mail: teodorescu@hausplan.ro		
SPECIFICATIE	NUME	SEMNATURA	PROIECT NR.
	An. Ioana Teodorescu		197/2022
SEF PROIECT	NUME	SEMNATURA	Faza:
	An. Ioana Teodorescu		E.T.
PROIECTAT	NUME	SEMNATURA	D.A.L.I.
	An. Silvia Coborosi		
DESEINAT	NUME	SEMNATURA	Planşa nr.:
	An. Silvia Coborosi		A 14
			- SITUATIA PROPUSI -

